# COSWICK HARDWOOD FLOORING | TECHNICAL INFORMATION

Product # 1167-1108

COSWICK Solid Hardwood Floors

**COLLECTION |** CLASSIC
**COLOR |** VANILLA

**Wood species |** Oak
**Grade |** Select & Better
**Constructions |** 3-layer T&G Engineered Flooring
**Size |** 15 x 127 x 600...2100 mm (⅝" x 5" x 2'...7')
**Finish |** Lacquer CosNanoTech+

## CONSTRUCTION : 3-LAYER T&G ENGINEERED FLOORING

| DIMENSIONS : | |
|---|---|
| Thickness | 15 mm (⅝") |
| Width | 127 mm (5") |
| Length | 600 ...2100 mm (2'...7') |
| Average length | 1,0 m (3 ⅜') |
| Microbevel | 0,5 mm |
| Joint type | tongue and groove (T&G) |

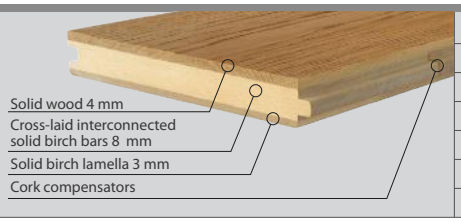


| PACKAGING : | BOX | PALLET |
|---|---|---|
| Content: | 2,0 m² | 40 (80,0 m²) |
| Weight | 21 kg | 852 kg |
| H x W x L | 125 x 160 x 2153 mm | 1120 x 810 x 2160 mm |
| Content: | 21,52 sq.ft. | 860,80 sq.ft. |
| Weight | 46 lb | 1885 lb |
| H x W x L | 5" x 6" x 85" | 44" x 32" x 85" |

| DEVIATIONS : | | |
|---|---|---|
| Deviation on Thickness | ± 0,2 mm | EN 13489<br>ГОСТ 862.3<br>СТБ 2121 |
| Deviation on Width | ± 0,2 mm | |
| Height Difference | ≤ 0,2 % of width | |
| Cup | ≤ 0,2 % of plank width | |
| Bow | ≤ 0,1 % of length | EN 13489 |
| Spring | ≤ 0,5 % of length | |

| CHARACTERISTICS : | | |
|---|---|---|
| Fire resistance | Dfl-s1 | EN 14342 |
| Formaldehyde emission class | E1 | |
| Pentachlorophenol content | None | |
| Thermal resistance | 0,095 m²·K/W | |
| Thermal conductivity | 0,158 W/(m·K) | |
| Structural warranty | Lifetime | |

**INSTALLATION :**

Glue down over concrete, plywood or wooden subfloor or nail down over wooden subfloor. Applicable above, on and below ground level.

**STORAGE AND USAGE :**

— Air humidity 40% – 65%
— Temperature +18 °C – +22 °C

## FINISH : LACQUER CosNanoTech+

| DESCRIPTION : | |
|---|---|
| Type of coating | UV-curable polyurethane-acrylate with micro-corundum |
| Surface (finish) type | Closed pores |
| Sheen | Semigloss 30-40 GU/60° |
| Finish warranty | 25 years |

| CLASSIFICATION SURFACE CHARACTERISTICS : | | |
|---|---|---|
| Wear resistance | Taber Test - 500 turns (S 42; 1000 gr) | EN 438-2 |
| Scratch resistance | Rating 3 | EN 438 |
| Slip resistance | 46 (SRV dry) | EN 15676 |
| Resistance to chemical agents | Class 5 (Except blue ink) | EN 13442 |
| Repairability | Low | |

**MAINTENANCE AND CARE CONDITIONS :**

Maintenance of hardwood floors with lacquer CosNanoTech+ finish assumes regular (daily if necessary) cleaning from dust and dirt using a vacuum, followed by a thorough cleaning using Coswick hardwood floor cleaner or other similar product. Due to high wear resistance properties, CosNanoTech+ lacquer finish does not require any additional care or finish renewal throughout the entire life of the floor.

## GRADE : SELECT & BETTER

| DESCRIPTION : | | DESCRIPTION : | |
|---|---|---|---|
| Sound sapwood | Permitted non-contrasting up to 25% of the plank area | Bark pocket | Permitted up to 10 mm in lenght, up to 3 mm in width, filled |
| Colour variation | Permitted slight colour variation | Pith | Permitted healthy heart |
| Knot | Permitted up to 10 mm, filled | Slope of grain | Permitted |
| Checks | Not permitted | Medullary ray | Permitted |

**Coswick Ltd.**
2B Kolasa Str., 223034 Zaslavl, Republic of Belarus
Tel.: +375-17-543-2012, Fax: +375-17-543-2020, E-mail: sales@coswick.com
**www.coswick.com**

nwfa National Wood Flooring Association

ECO FRIENDLY
No added formaldehyde

ISO 9001

FSC